WILKA®
SCHLIESSTECHNIK

1433 Einsteckschloss mit Renovierungsstulp | Mortise lock with renovation forend

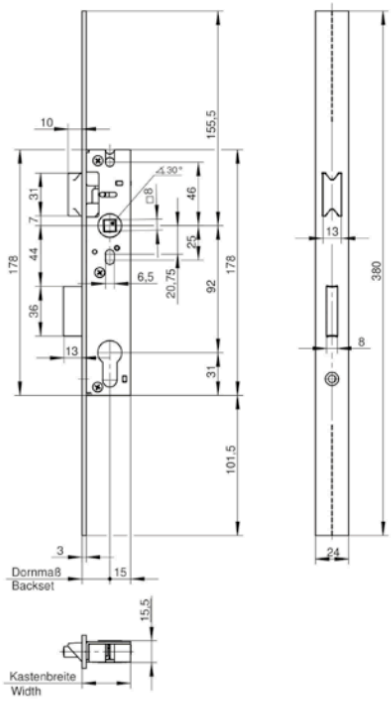

Einsteckschloss 1433 für Rohrrahmentüren mit spezieller Stulp für Renovierungs- und Reparaturbedarf erhalten Sie in 20 mm Dorn. Der Schlossstulp hat eine Sonderlänge von 380 mm und eine komfortable Bohrnut auf der Stulprückseite zur individuellen Anpassungen der Anschraublöcher.

- Universeller Einsatz, dadurch Zeit- und Kostenersparnis
- Bewährtes WILKA-Baukastensystem
- Alternative für viele Fabrikate anderer Hersteller durch kleinstes Kastenmaß
- Keine Anschraublöcher, dadurch individuell verwendbar
- Bohrnut auf der Stulprückseite

The mortise lock 1433 for metal frames with special forend for renovation and repair requirements is receivable in 20 mm backset. The forend dimension has a special length of 380 mm and a comfortable drilling groove on the rearside of the forend for individual adjustments to the conditions on-site.

- Universal application, thereby saving both time and money
- Reliable WILKA modular system
- Alternative for a lot of products of other manufacturer through smallest width
- No screw holes, therefore individually applicable
- Drilling groove on the rearside of the forend

1433 Merkmale und Sonderausführungen | Standard designs and special designs							
Dornmaß in mm Backset in mm	20			Stulp Edelstahl rostfrei | Forend stainless steel Falle & Riegel vernickelt | Latch & dead bolt nickel-plated	■
Kastenbreiten in mm Widths in mm	35			Flachstulp 24 mm Forend 24 mm	■
Riegelausschluss 13 mm Dead bolt throw 13 mm	■			U-Stulp 24x6x2 mm U-striking plate 24x6x2 mm	□
Nuss in mm Follower in mm	8 ■	9 □	10 □	Vorgerichtet für Schweizer Rundzylinder Prepared for RZ 22 (swiss standard)	□
Falle umlegbar Reversible latch bolt	■			SKG**Ausführung erhältlich SKG** version available	–
Falle vorstehend 3 oder 5 mm Latch bolt extended 3 or 5 mm	□			Passende Schließbleche auf Seite Matching striking plates on page	238 - 240
Riegel vorstehend 3 oder 5 mm Dead bolt extended 3 or 5 mm	□				

■ Standardausführung
Standard design

□ Sonderausführung
Special design